

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 03282276
PUBLICATION DATE : 12-12-91


APPLICATION DATE : 29-03-90
APPLICATION NUMBER : 02084534

APPLICANT : YUASA CORP;

INVENTOR : YAMANAKA MASAO;

INT.CL. : G01R 31/36

TITLE : METHOD FOR JUDGING LIFE OF
LEAD STORAGE BATTERY

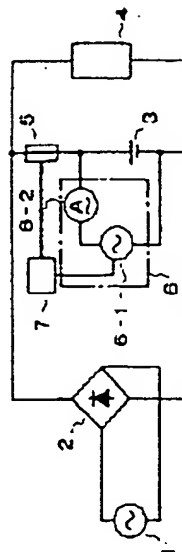

ABSTRACT : PURPOSE: To judge life by measuring internal impedance by measuring the ripple voltage due to the ripple current contained in the charge current of the lead storage battery connected in a floating charge state through a rectifier.

CONSTITUTION: In a system for the floating charge of a lead storage battery from a commercial power supply 1 through a rectifier 2, a ripple voltage detector 5 is inserted in the charge path of the lead storage battery 3 and the ripple voltage measured by the ripple voltage detector 5 and the voltage measured by an internal impedance measuring device 6 are inputted to an adder 7 to calculate added voltage and the value calculated by dividing this added voltage by the measured current flowing when the measured voltage of the internal impedance measuring device 6 is applied is displayed as an internal impedance. By this method, the internal impedance in a floating charge state can be accurately measured.

COPYRIGHT: (C) JPO